

Attributes

- T8 lamp technology means high efficacy
- HF Electronic Control Gear
- Easy Installation
- Good Photometric Performance
- Powder coated steel body

Description

A very strong range of linear fluorescent batten fittings for general use. The luminaire uses T8 high efficiency lamps with high frequency electronic control gear, with a square section styrene prismatic controller. The body is made from powder coated mild steel, with polycarbonate end caps. They are suitable for use in many commercial and industrial applications, such as storerooms, corridors, toilet areas, and general offices. There are various sizes and lamp options available to suit the particular application.

Specification


LAMP TYPE	CATALOGUE NUMBER	WEIGHT (KG)
1 x 18W T8 fluorescent	BFSP 118.HF.SP	1.82
2 x 18W T8 fluorescent	BFSP 218.HF.SP	2.18
1 x 36W T8 fluorescent	BFSP 136.HF.SP	2.75
2 x 36W T8 fluorescent	BFSP 236.HF.SP	3.81
1 x 58W T8 fluorescent	BFSP 158.HF.SP	3.01
2 x 58W T8 fluorescent	BFSP 258.HF.SP	4.47
1 x 70W T8 fluorescent	BFSP 170.HF.SP	3.75
2 x 70W T8 fluorescent	BFSP 270.HF.SP	5.66
OPTIONS		
3hr maintained emergency	.EM	1
HF digital SwitchDIM dimming gear	.HFSD	

Technical

This range is suitable for normal operation from a 230V 50Hz supply. Do not carry out high voltage circuit tests with these luminaires. Ensure that the luminaires are kept away from moisture and water. For any advice regarding the technical aspects of these products please consult our technical department.

Dimensions

AS PER TABLE BELOW

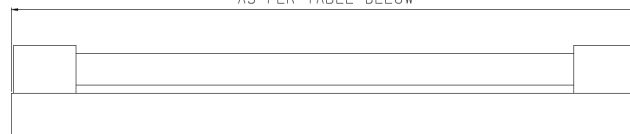

18W	36W	58W	70W
627.0mm	1238.0mm	1538.0mm	1802.0mm
FIXING CENTERS AT 600.0mm DISTANCE			

Photometrics

