

Attributes

- Cast Aluminium body, tempered glass cover
- Anti-Light Pollution design
- Removable Geartray
- Pole or bracket mounting Options
- Excellent Photometric performance

Description

A range of modern road lighting lanterns with cast aluminium body and flat toughened glass panel for mounting up to 12m. The luminaires use a flat panel to minimise light spillage and therefore reduce light pollution. They are designed for use on access and site roads where aesthetic appearance and efficient running costs are important. There are various lamp options to enable a suitable balance between efficacy and effect to be achieved.


Specification

LAMP TYPE	CATALOGUE NUMBER	WEIGHT (KG)
100W SON-T	VIV 100S	10.6
150W SON-T	VIV 150S	11.4
250W SON-T	VIV 250S	12.2
125W MBF-U	VIV 125M	10.4
250W MBF-U	VIV 250M	11.2
250W HQI-T	VIV 250MH	12.2
OPTIONS		
Wall bracket	VIV.WB	7.2
Corner wall bracket	VIV.CB	7.8

Technical

This range is suitable for normal operation from a 230V 50Hz supply. Other options are available. Do not carry out high voltage circuit tests with these luminaires. Always replace lamps before cycling occurs at end of life to avoid damage or injury due to lamp rectification. For any advice regarding the technical aspects of these products please consult our technical department.

Dimensions

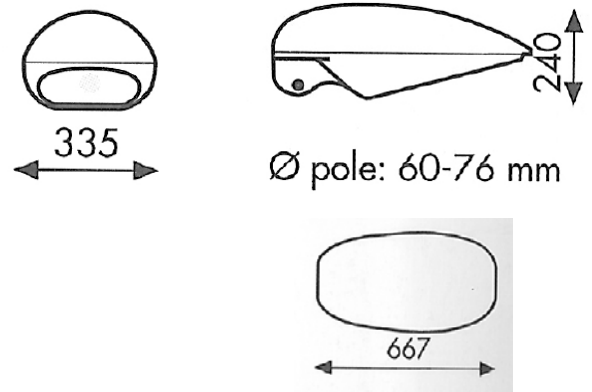

Photometrics

