


Manufacturers of Commercial, Industrial  
& Special Purpose Light Fittings

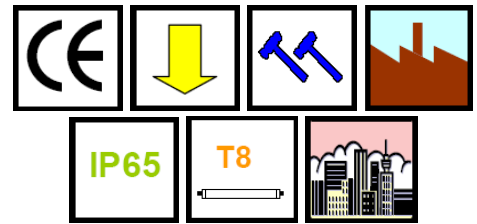

## Attributes

- **Secure & Sealed to IP65**
- **Prismatic PVC TP(a) Panel**
- **Low running costs with HF gear**
- **Easy Access with 'Twist & Lock' Stainless Steel Bolts**
- **Excellent Photometric Performance**


## Description

A modern range of recessed modular lighting units for use in vulnerable or wet areas. The luminaire uses T8 fluorescent lamps in an IP65 sealed housing. The body is made from powder coated mild steel with side arm suspension brackets for mounting in most ceilings. The prismatic Polycarbonate panel is mounted in a sealed front frame, attached to the fitting body by stainless steel twist and lock bolts.


## Specification

LAMP TYPE	CATALOGUE NUMBER	WEIGHT (KG)
2 x 36W T8 fluorescent	ZET 236	6.58
2 x 58W T8 fluorescent	ZET 258	6.77
3 x 18W T8 fluorescent	ZET 318	10.1
3 x 36W T8 fluorescent	ZET 336	10.4
4 x 18W T8 fluorescent	ZET 418	6.66
4 x 36W T8 fluorescent	ZET 436	8.35
<b>OPTIONS</b>		
HF electronic digital	.HFDD	
3hr maintained emergency on one tubeway	.EM	+ 1
Stainless Steel Security Bolts	.SS	

## Dimensions

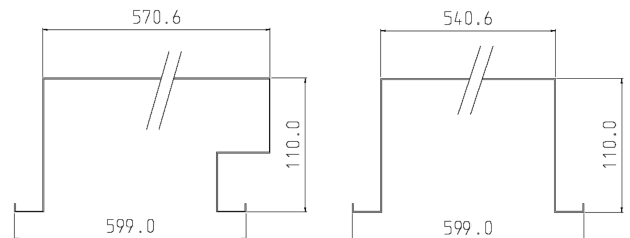

## Photometrics

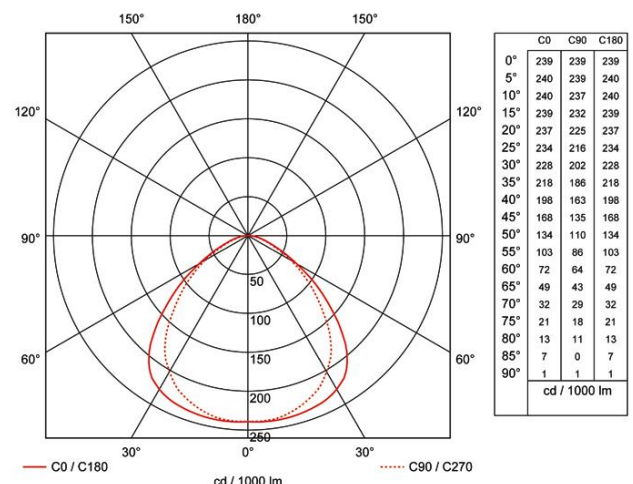

## Technical

This range is suitable for normal operation from a 230V 50Hz supply. Do not carry out high voltage circuit tests with these luminaires. Ensure that lamps are replaced before reaching end of life to avoid damage and injury. For any advice regarding the technical aspects of these products please consult our technical department.