




Manufacturers of Commercial, Industrial
& Special Purpose Light Fittings

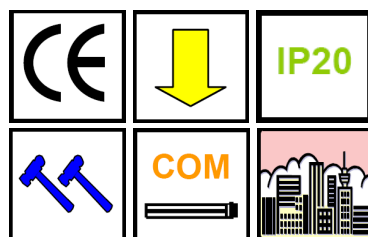

Attributes

- **Low Glare Gull-Wing Reflector**
- **High Frequency Electronic gear**
- **High Performance VDU Louvre**
- **Easy Lamp Replacement**
- **Excellent Photometric performance**

Description

Recessed fluorescent modular range of decorative luminaires designed for public commercial environments. The luminaire uses compact lamps with high frequency electronic control gear. The gull-wing reflector is made from shaped powder coated mild steel, whilst the 65deg louvre allows use in VDU areas, and the perforated cylinder hides the lamps from direct view. A clear polycarbonate panel protects the fitting from attack. The luminaires are designed for use in office areas where aesthetic appearance is important, and there are various options of light source available to enable a suitable balance between efficacy, conformity in line with LG3: 2001 amendment, and visual effect to be achieved.


Specification

LAMP TYPE	CATALOGUE NUMBER	WEIGHT (KG)
1 x 36W TC-L	PAP 136L.HF	4.8
1 x 40W TC-L	PAP 140L.HF	4.8
1 x 55W TC-L	PAP 155L.HF	4.8
2 x 36W TC-L	PAP 236L.HF	5.8
2 x 40W TC-L	PAP 240L.HF	5.8
2 x 55W TC-L	PAP 255L.HF	5.8
OPTIONS		
3hr maintained emergency	.EM	1
Set of fixing brackets	.BKT	0.5

Technical

This range is suitable for normal operation from a 230V 50Hz supply. Other options are available. Do not carry out high voltage circuit tests with these luminaires. Always replace lamps before cycling occurs at end of life to avoid damage or injury due to lamp rectification. For any advice regarding the technical aspects of these products please consult our technical department.

Dimensions

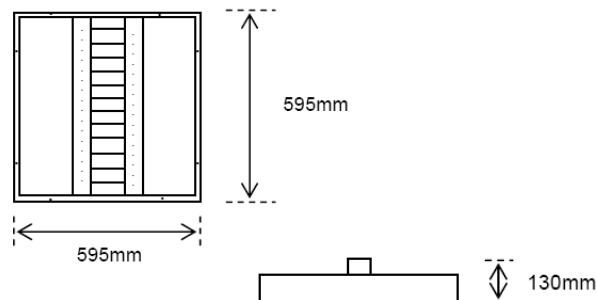

Photometrics

