




Manufacturers of Commercial, Industrial
& Special Purpose Light Fittings

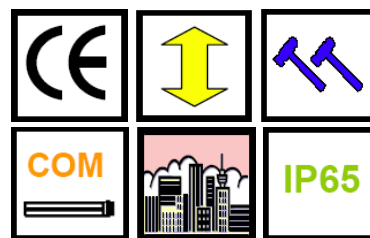

Attributes

- Polycarbonate Lens, cast aluminium body
- High Frequency Electronic gear
- Screw Fix Construction
- Easy Lamp Replacement
- Excellent Photometric performance

Description

A compact fluorescent range of vandal resistant yet decorative luminaires designed for interior and exterior environments. The luminaire uses compact lamps with high frequency electronic control gear. The body is manufactured from die-cast aluminium, and the opal diffuser is polycarbonate. They are available with black, white or silver body. The luminaires are flat to the wall, and are designed for use in those areas where anti-ligature is important. There are various lamp options available to enable a suitable balance between efficacy and effect to be achieved.


Specification

LAMP TYPE	CATALOGUE NUMBER	WEIGHT (KG)
16W 2D 4pin	TRR 16DD	4.65
28W 2D 4pin	TRR 28DD	4.65
38W 2D 4pin	TRR 38DD	4.65
36W TC-F	TRR 36F	4.65
OPTIONS		
Silver body	.S	
Black body	.B	
White body	.W	
Switchstart control gear	.S	1
3hr maintained emergency	.M3	1.1

Technical

This range is suitable for normal operation from a 230V 50Hz supply. Other options are available. Do not carry out high voltage circuit tests with these luminaires. Always replace lamps before end of life to avoid damage or injury due to lamp rectification. For any advice regarding the technical aspects of these products please consult our technical department.

Dimensions

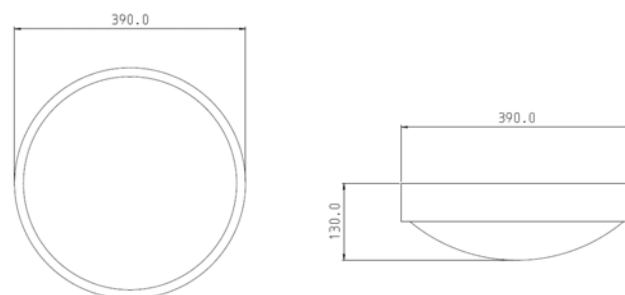

Photometrics

